

MQ MULTIQUIP



GloBug™ Lighting Systems




See the light.

Construction Starts Here

www.multiquip.com


GBW — GloBug Solo

When space is limited but illumination is required, call on the Multiquip GloBug Solo GBW Series

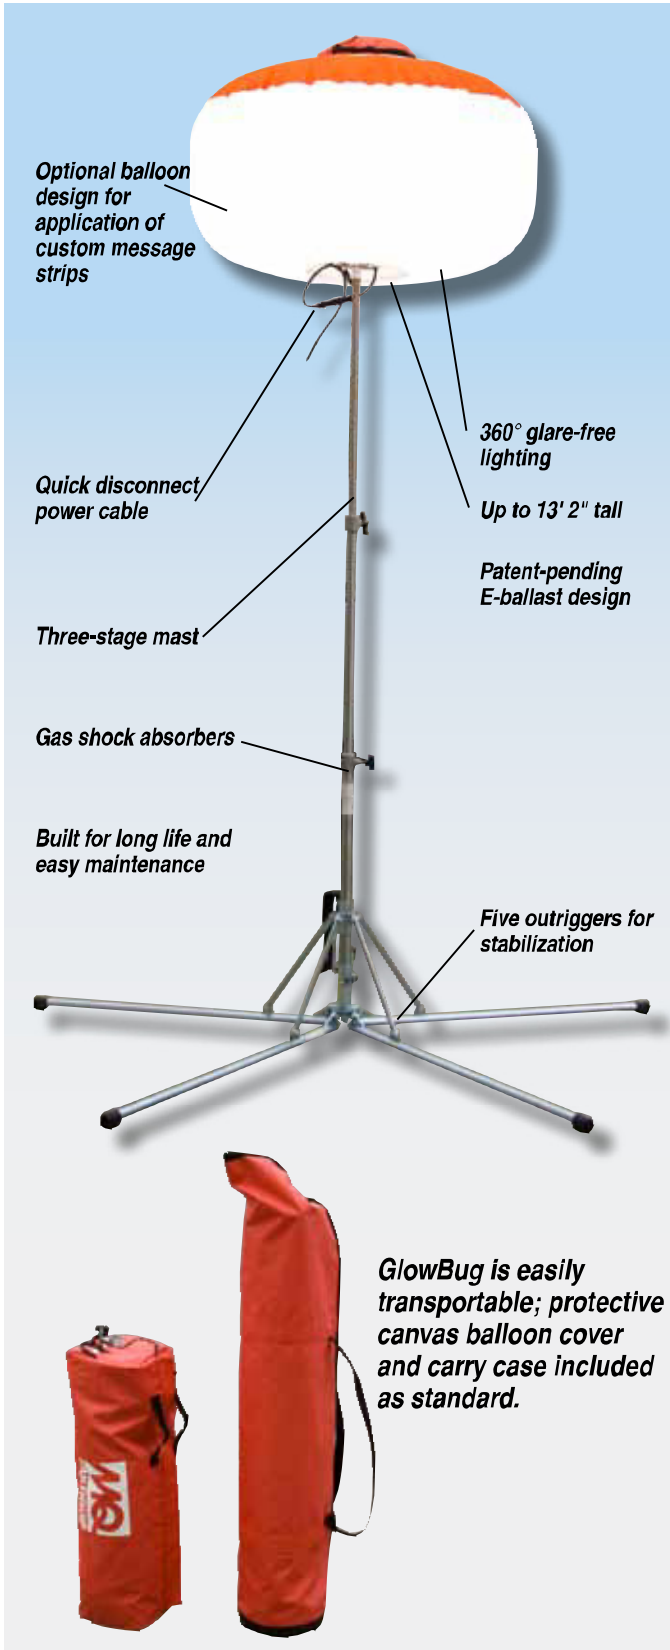

- Metal Halide lamp — single 1,000 watt lamp for maximum illumination. Pure white light — 3400° K.
- 360° glarefree illumination with standard balloon.
- Quick restrike time — 3 to 5 minutes.
- Universally adaptable to all AC power supplies — accepts 50/60Hz, 100-240V.
- Downward direct illumination with reflector balloon.
- Self-inflating balloons are easy to install and inflate in less than 20 seconds.
- Optional message strip available.
- Three-stage mast — extends up to 13' 2".
- Five outriggers for great stabilization.
- Light coverage up to 150 feet.

Illumination Range

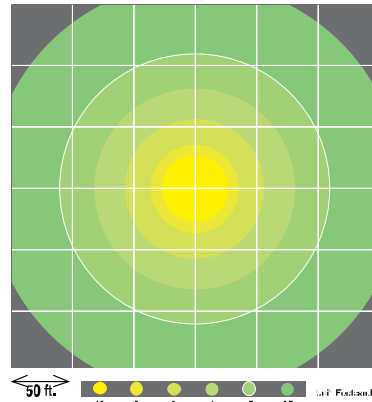

Footcandles	Feet
	BAL115D
10	27
5	36
2	57
1	82
0.5	110
0.25	168

Specifications

Model	GBW
Voltage (V)	100 to 240V
Amps (A)	9.3 @ 120V
Hz	50-60
Lamp Type	1,000 watt Metal Halide (x1)
Total Luminous Flux (lm)	107,000
Standard Balloon Diameter in. (mm)	47.2 (1200)
Outriggers	5
Mast — Number of stages	3 Stages (Air Shock Absorbers)
Lower Position Working Dimensions LxWxH in. (mm)	73.2 x 77.2 x 90.6 to 141.7 (1,860 x 1,960 x 2,300 to 3,600)
Upper Position Working Dimensions LxWxH in. (mm)	64.6 x 67.9 x 107 to 158.3 (1,640 x 1,725 x 2,720 to 4,020)
Storage Dimensions LxWxH in. (mm)	Lamp: 8.7 x 8.7 x 40 (220 x 220 x 1015) Pentapod: 7.9 x 8.7 x 28.3 (200 x 220 x 720)
Balloon Dimensions LxWxH in. (mm)	47.2 x 47.2 x 28.3 (1200 x 1200 x 720)
Weight lb. (kg)	56 (25.6)
Appropriate Generator	1700 Watts